
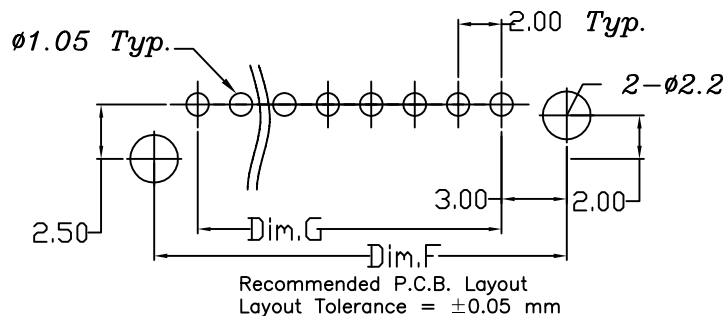

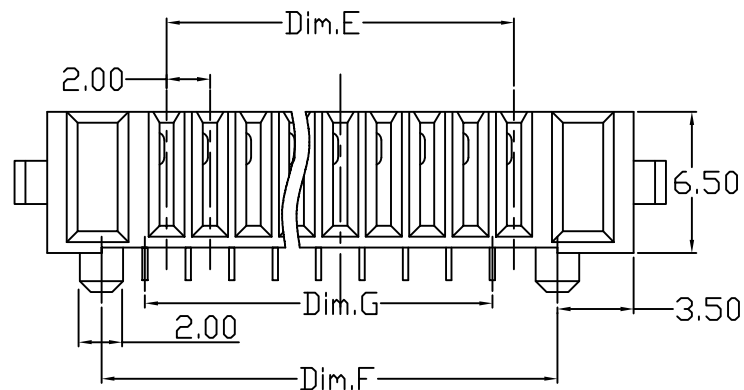
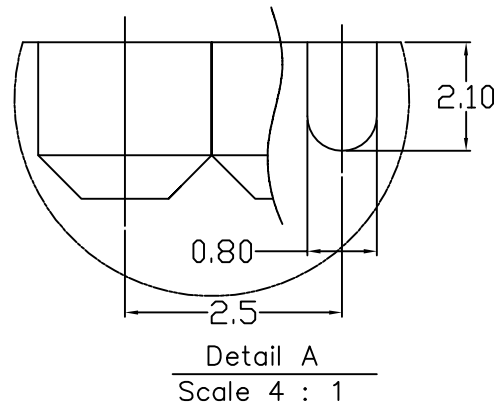


RoHS Compliant

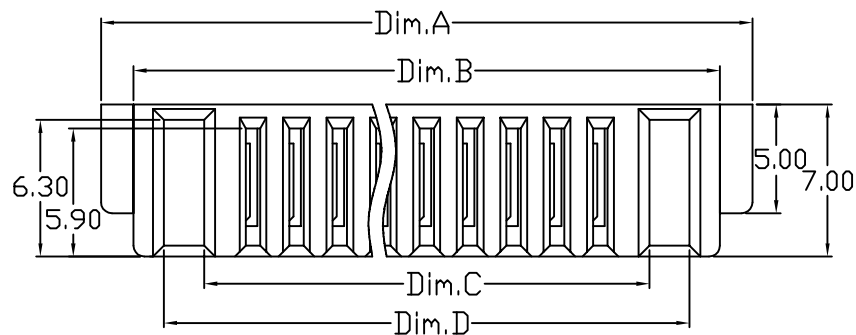

Notes:

1.Material:

Housing: PA9T+30%GF Black, UL94-V0
Terminal: Phosphor Bronze
Contact Plating: Gold over Nickel or Tin

2.Performance:

Current Rating: 5A/Pin
Instantaneous Current: 7A/Pin
Contact Resistance: 30MΩ
Insulation Resistance: 100MΩ
Dielectric Voltage: 500V
Operating Temperature: -40°C~105°C
Temperature Resistance: 260°C,5Sec

3.Ordering Information:

BF20-0603XXP-01TX

Amount of Pins:

05 : 5 Pins

12 : 12 Pins

Plating Option:

1 : Gold flash

2 : 2U" Gold on contact Area

3 : 5U" Gold on contact Area

Part No.	Dim.	Dim.A	Dim.B	Dim.C	Dim.D	Dim.E	Dim.F	Dim.G
BF20-060305P-01TX		22.00	19.00	12.50	16.20	8.00	13.00	8.00
BF20-060306P-01TX		24.00	21.00	14.50	18.20	10.00	15.00	10.00
BF20-060307P-01TX		26.00	23.00	16.50	20.20	12.00	17.00	12.00
BF20-060308P-01TX		28.00	25.00	18.50	22.20	14.00	19.00	14.00
BF20-060309P-01TX		30.00	27.00	20.50	24.20	16.00	21.00	16.00
BF20-060310P-01TX		32.00	29.00	22.50	26.20	18.00	23.00	18.00
BF20-060311P-01TX		34.00	31.00	24.50	28.20	20.00	25.00	20.00
BF20-060312P-01TX		36.00	33.00	26.50	30.20	22.00	27.00	22.00

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

DRAWN NO:

DATE

UNIT: MM

WSD
CONNECTORS

東莞市萬盛達電子有限公司

DongGuan Wonstar Electronic Co.,Ltd

.X ±0.25 X* ±10°

DESIGN

Jack Liu

2009/06/15

SCALE: 1:1

TITLE:

2.0 Pitch Battery Conn. Female

.XX ±0.15 .X* ±5°

CHECK

Andson Li

2009/06/17

SHEET: 1/1

PROJECT:

BF20-0603XXP-01TX

.XXX ±0.10 .XX* ±2°

APPROVAL

Peter Chen

2009/06/17

PROJECT:

PART NO:

BF20-0603XXP-01TX