
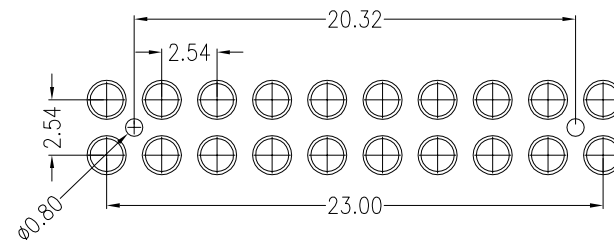

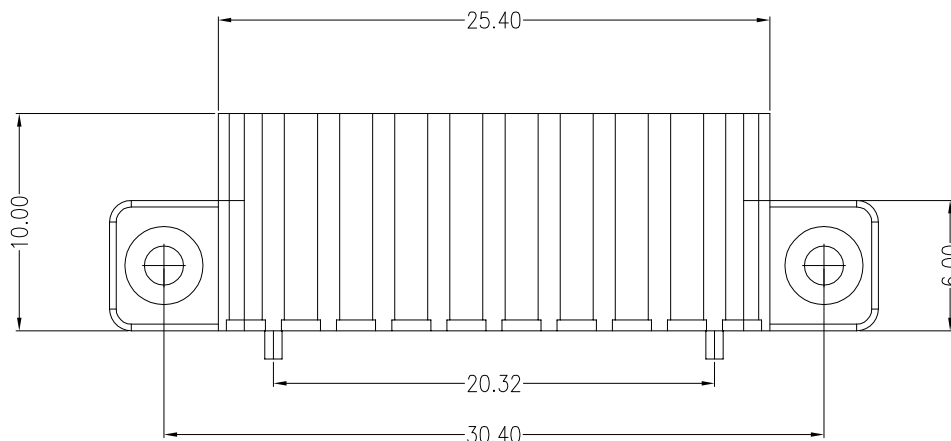


RoHS Compliant

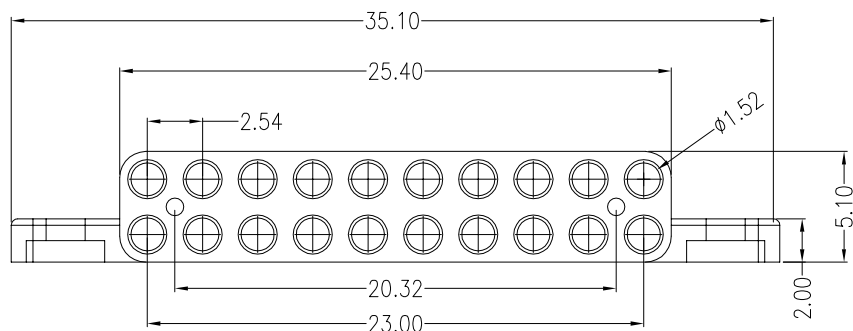

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

NOTE:

1.Material

.Cover:Black PA9T(UL94V-0)

.Plunger:Brass

2.Plating

.Contact surface:1~3U" minimum Au over 80~100U" Ni

3.Electrical

.Rated Current & Voltage: DC 12V; AC 1A

.Contact Resistance:25m Ω maximum

4.RoHs COMPLIED PROUCT

5.Temperature:-40℃~+80℃

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

X.X	± 0.25
X.XX	± 0.15
X.XXX	± 0.10
X*	$\pm 10.0^{\circ}$
X.X*	$\pm 5.0^{\circ}$
X.XX*	$\pm 2.0^{\circ}$

DRAWN NO:

DESIGN

CHECK

APPROVAL

Jack Liu

Andson Li

Peter Chen

DATE

2016/12/19

2016/12/19

2016/12/19

UNIT: MM

SCALE: 1:1

SHEET: 1/1

PROJECT:

WSD
CONNECTORS

東莞市萬盛達電子有限公司
DongGuan Wonstar Electronic Co.,Ltd

TITLE:

2.54mm Pitch Pogo pin 20P Male
塑高10.0mm 针长11.0mm

PART NO:

PG254H10D11M20P

RoHS Compliant