

版本 REV	修改记事 Amend Memorize	修改者 Revisions	日期 Date
A0	原版发行	Jack Liu	2008.01.10

Notes:

1. Material:

Housing: PA9T+30%GF Black, UL94-V0

Terminal: Phosphor Bronze

Contact Plating : Gold over Nickel or Tin

2. Performance:

Current Rating: 5A/Pin

Instantaneous Current : 7A/Pin

Contact Resistance: 30MΩ

Insulation Resistance: 100MΩ

Dielectric Voltage: 500V

Operating Temperature: -40° C~105° C

Temperature Resistance : 260° C, 5Sec

3. Ordering Information:

WSD-BAF2064-XX P- 01T X

Amount of Pins:

05 : 5 Pins

S

12 : 12Pins

Plating Option:

1 : 1U" Gold

2 : 2U" Gold on contact Area


3 : 5U" Gold on contact Area

Part No.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G
WSD-BAF2064-05P-01TX	22.00	19.00	15.55	13.15	8.00	13.00	8.00
WSD-BAF2064-06P-01TX	24.00	21.00	17.55	15.15	10.00	15.00	10.00
WSD-BAF2064-07P-01TX	26.00	23.00	19.55	17.15	12.00	17.00	12.00
WSD-BAF2064-08P-01TX	28.00	25.00	21.55	19.15	14.00	19.00	14.00
WSD-BAF2064-09P-01TX	30.00	27.00	23.55	21.15	16.00	21.00	16.00
WSD-BAF2064-10P-01TX	32.00	29.00	25.55	23.15	18.00	23.00	18.00
WSD-BAF2064-11P-01TX	34.00	31.00	27.55	25.15	20.00	25.00	20.00
WSD-BAF2064-12P-01TX	36.00	33.00	29.55	27.15	22.00	27.00	22.00

WSD
connector

东莞市萬盛達电子有限公司
Dong Guan Wonstar Electronic Co., Ltd

DIMENSION IN mm(inch)		Projection		Title: 2.0 Pitch Battery Conn. Female Type					
Tolerance unless otherwise specified									
X.	X° ± 10°	Date:	2008/01/10	Part No. : WSD-BAF2064-XXP-01TX					
X.X ± 0.40	X.X° ± 5°	Drawn:	Jack Liu						
X.XX ± 0.25	X.XX° ± 2°	Check:	Andson Li						
X.XXX ± 0.10	X.XXX° ±	Approved:	Andson Li						
		Rev.	A0	Unit:	mm	Scale:	4:1	Size:	A4

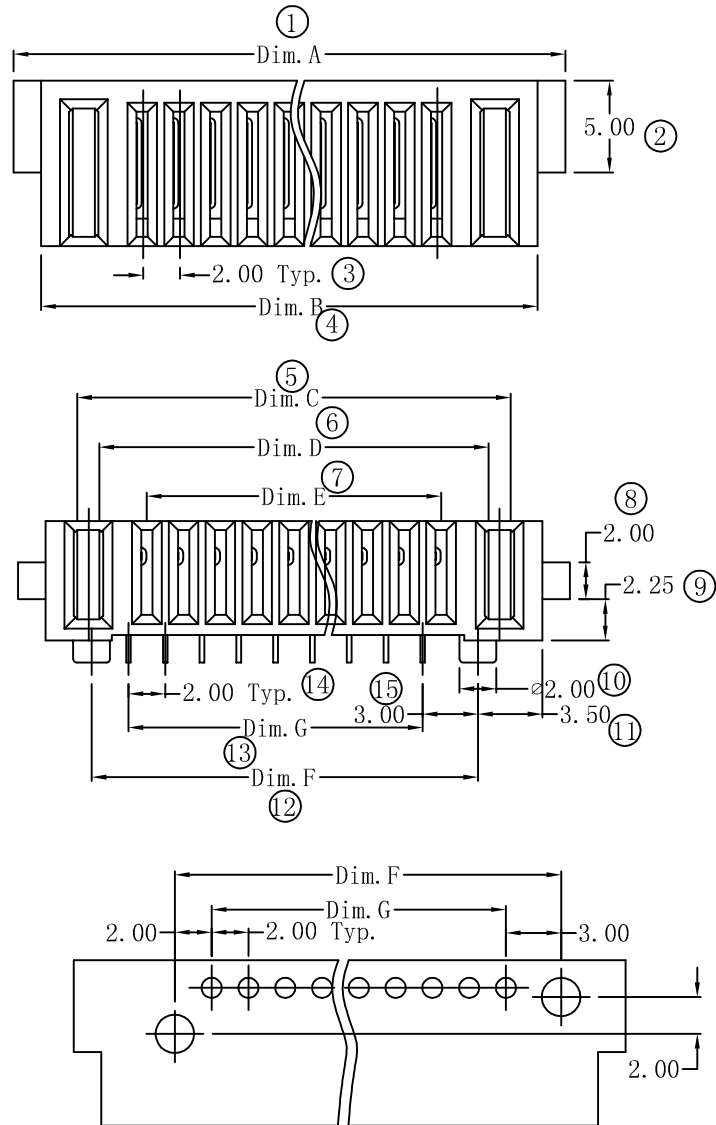

Recommended P.C.B. Layout
Layout Tolerance = ±0.05 mm