

版本 REV	修改记事 Amend Memorize	修改者 Revisions	日期 Date
A0	原版发行	Jack Liu	2008.01.10

Notes:

1. Material:

Housing: PA9T+30%GF Black, UL94-V0

Terminal: Phosphor Bronze

Contact Plating : Gold over Nickel or Tin

2. Performance:

Current Rating: 5A/Pin

Instantaneous Current : 7A/Pin




Contact Resistance: 30MΩ

Insulation Resistance: 100MΩ

Dielectric Voltage: 500V

Operating Temperature: -40° C ~105° C

Temperature Resistance : 260° C, 5Sec

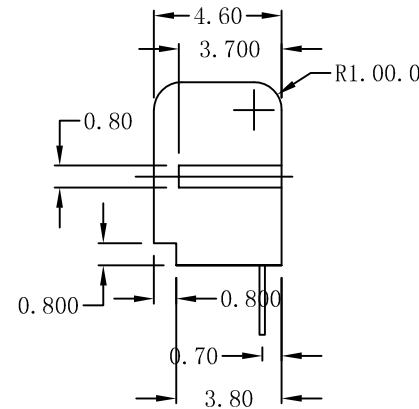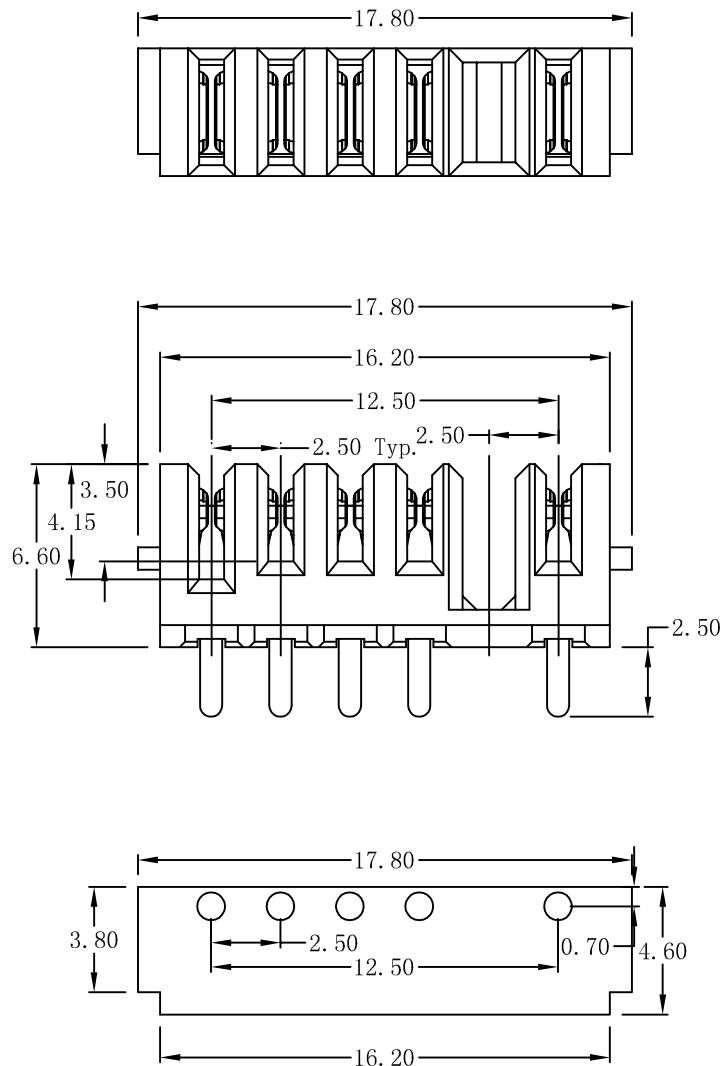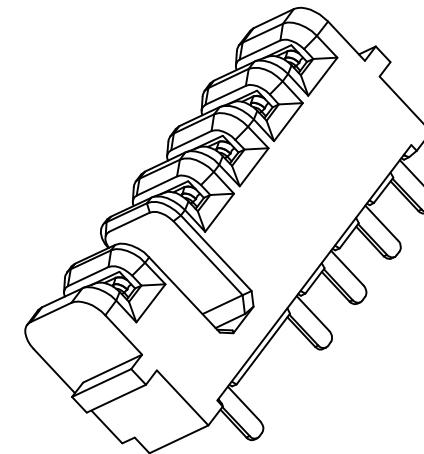

Recommended P.C.B. Layout Layout Tolerance = ± 0.05 mm

WSD
connector

东莞市萬盛達電子有限公司
DongGuan Wonstar Electronic Co.,Ltd

DIMENSION IN mm(inch)			Projecton		Title: 2.5 Pitch Battery Conn. Female Type				
Tolerance unless otherwise specified									
X.	X°	± 10°	Date:	2008/01/10	Part No. : WSD-BBF2040-05P-01T1				
X.X ± 0.40	X.X° ± 5°	Drawn:	Jack Liu						
X.XX ± 0.25	X.XX° ± 2°	Check:	Andson Li						
X.XXX ± 0.10	X.XXX° ±	Approved:	Andson Li						
Rev.		A0	Unit:	mm	Scale:	4:1	Size:	A4	